
Datapipe Auth Two-Factor Authentication – VPN Client Configuration (Mac OSX)

Any IPSEC VPN client that supports RADIUS should work with Datapipe Auth. This document shows how to configure the Mac OSX VPN client.


1. Open your System Preferences




2. Type "vpn" (without the quotes) into the search box and open the Network item.

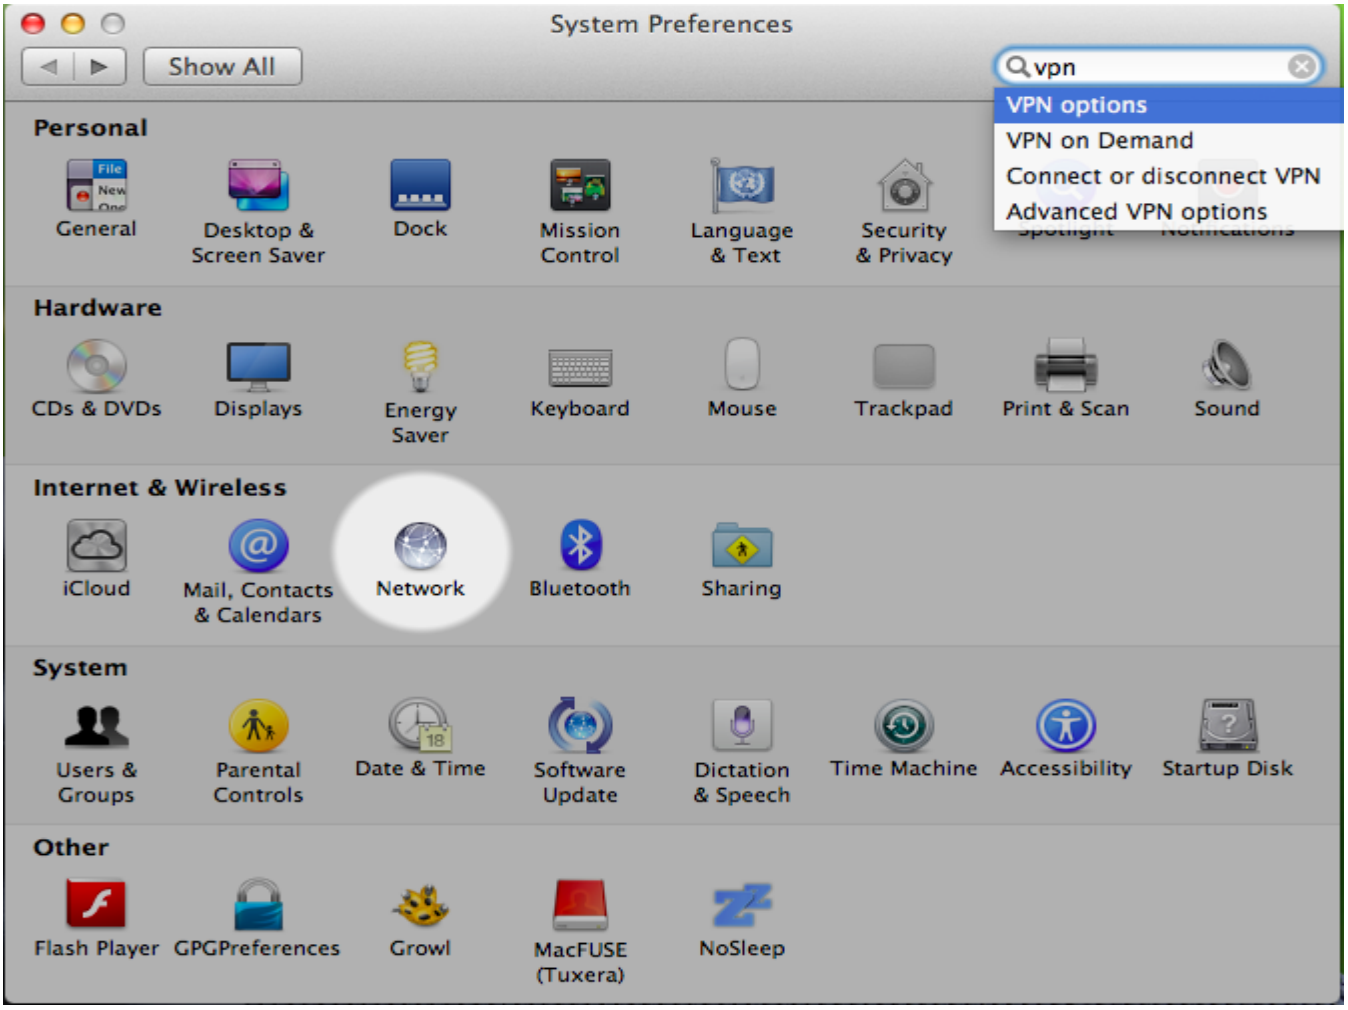


3. Click the button to create a new connection as shown below.

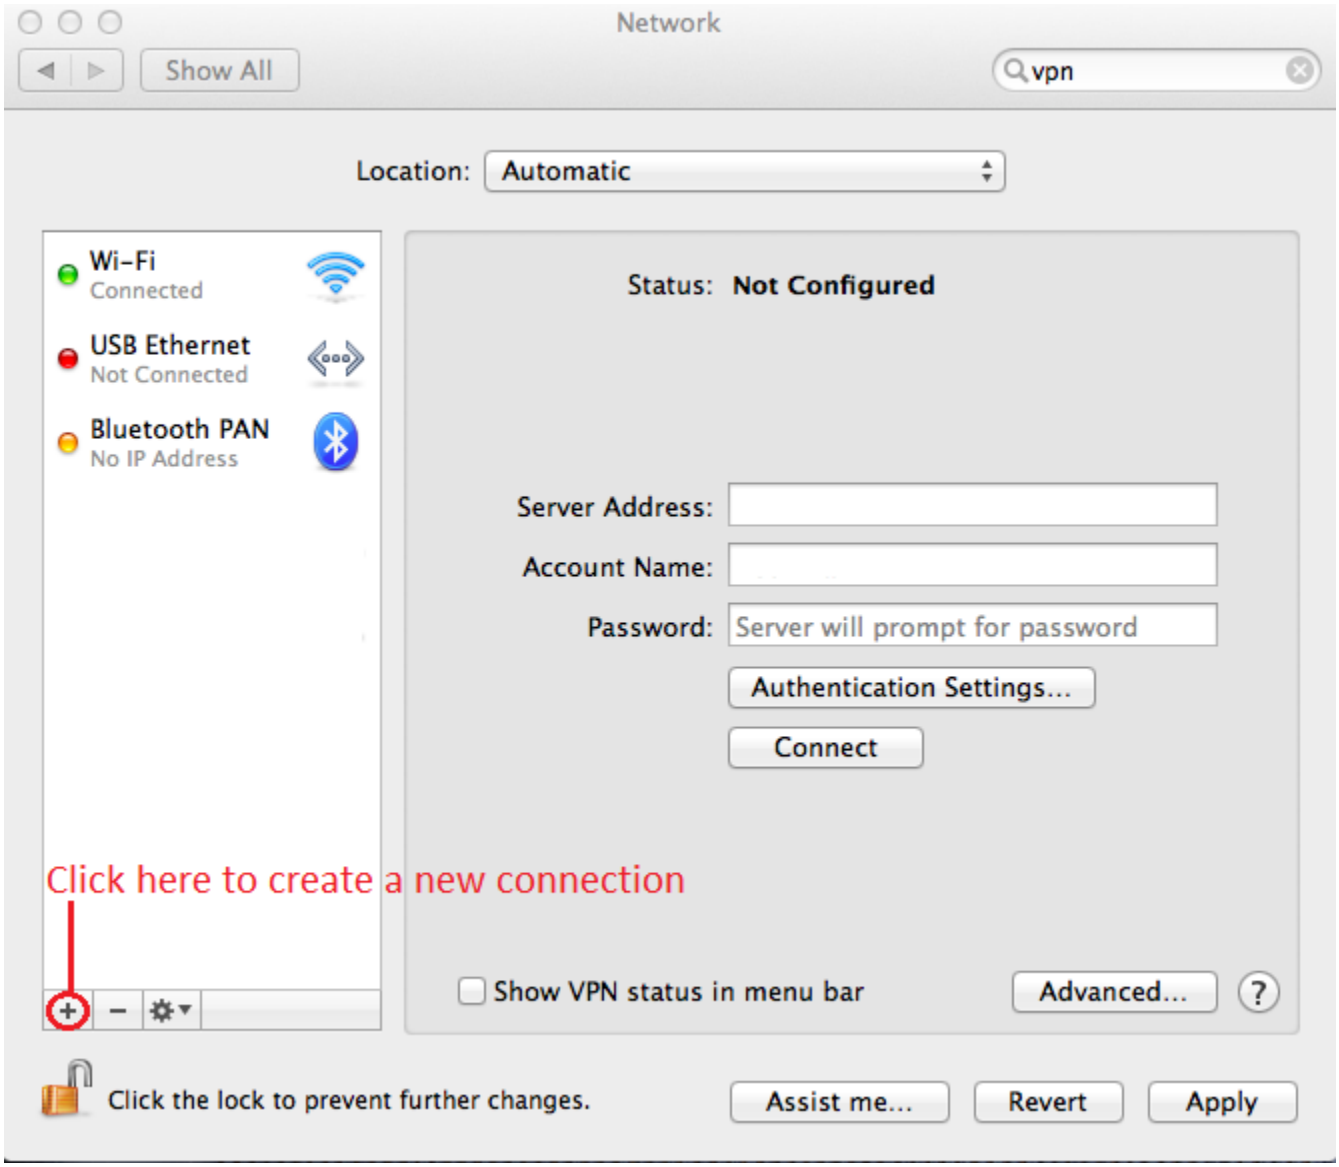


Note the following dialog that appears.

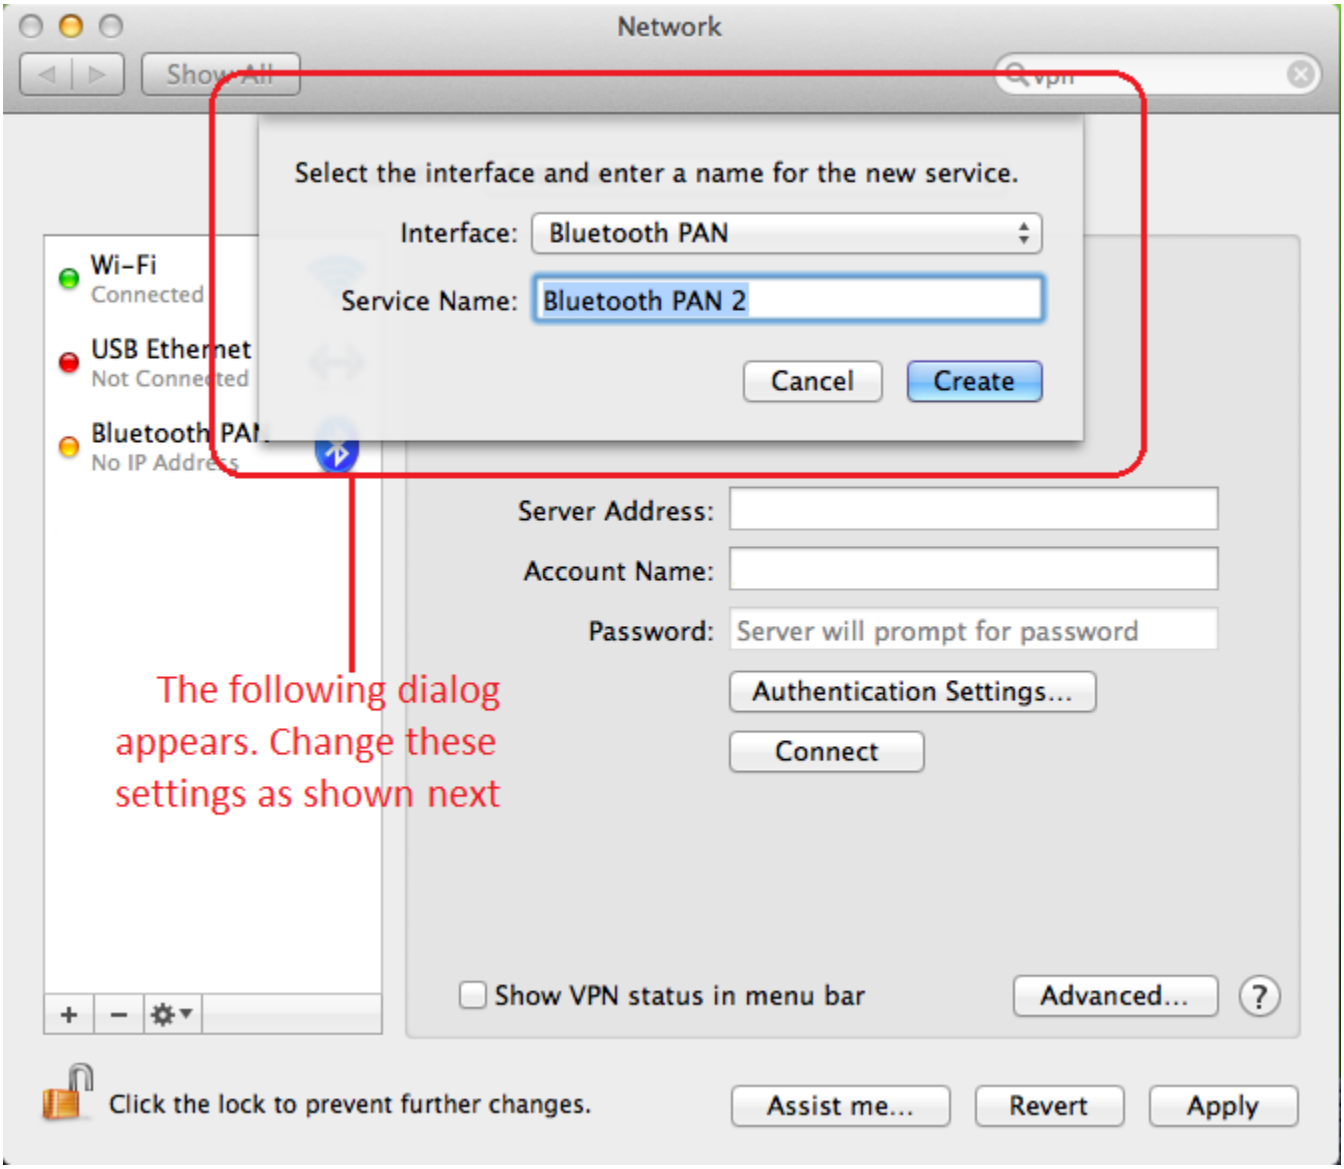


4. Change the information as shown below.

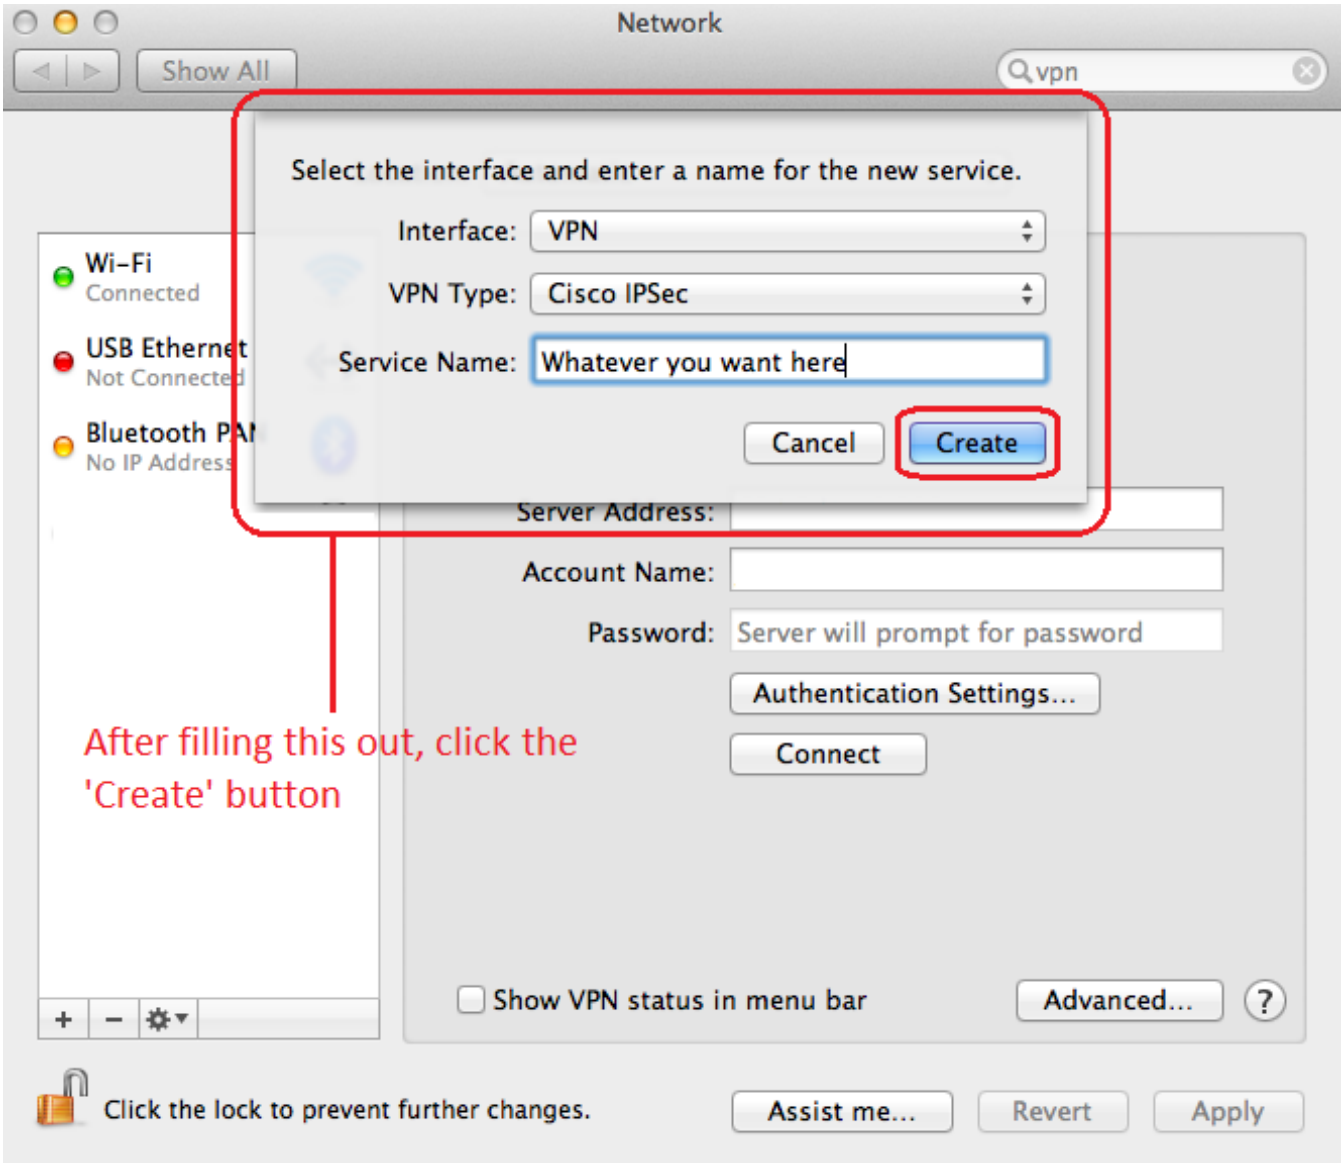

5. Fill out the information as shown below and then click the "Authentication Settings" button.

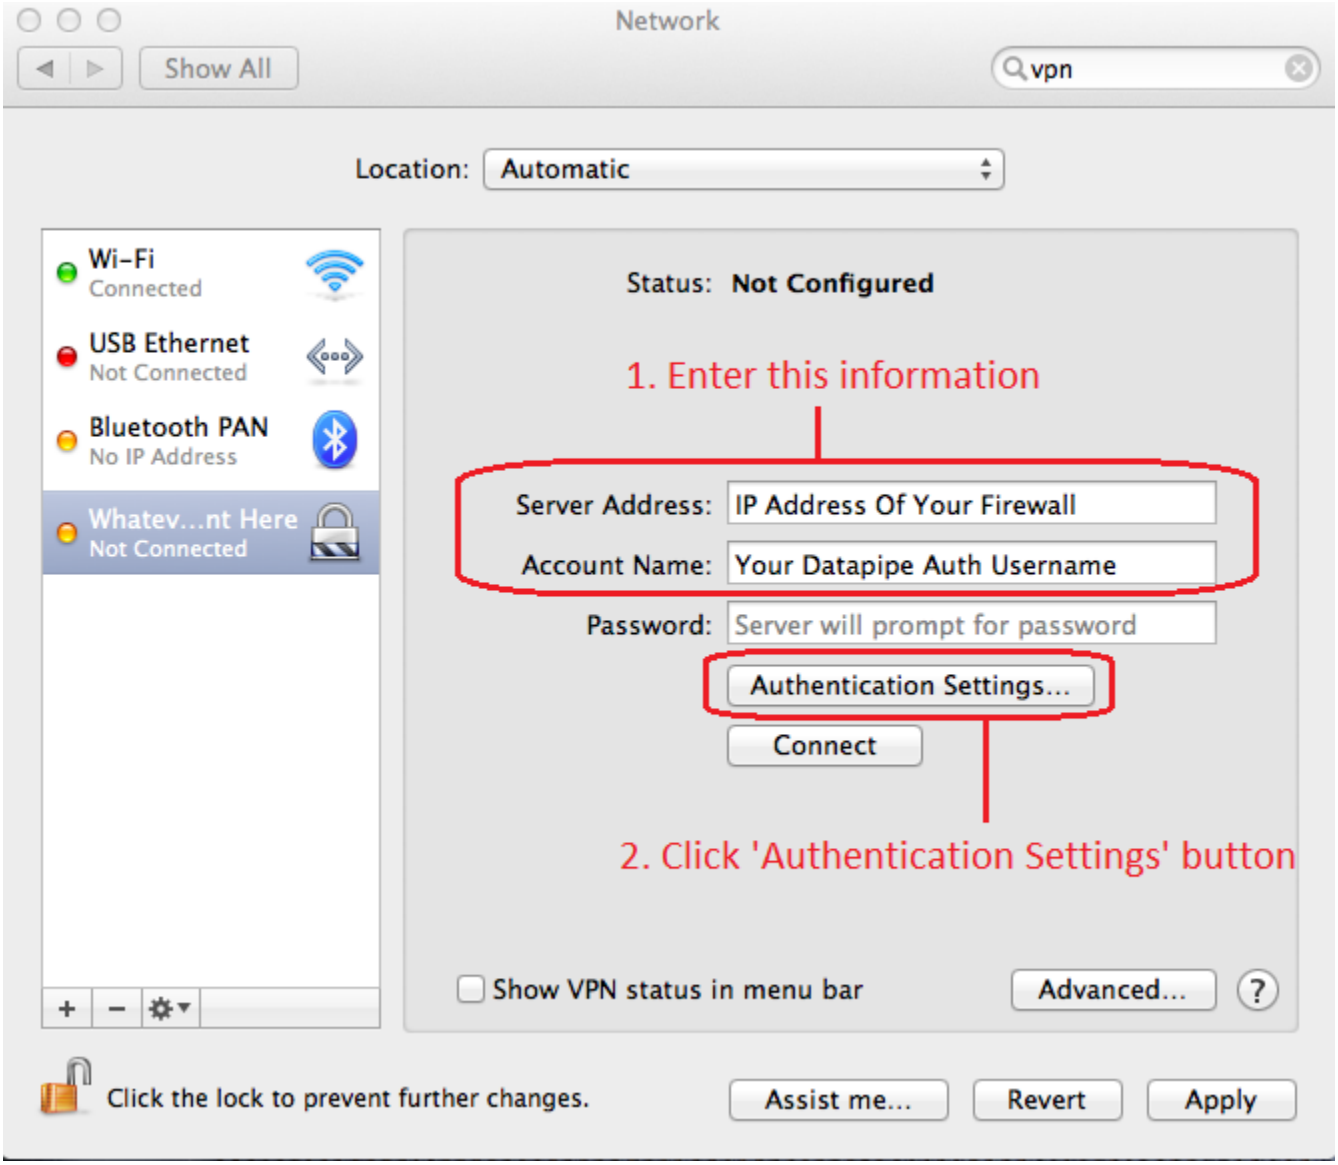

6. Fill out the Authentication Settings as shown below and click "OK". Then click the "Apply" button.

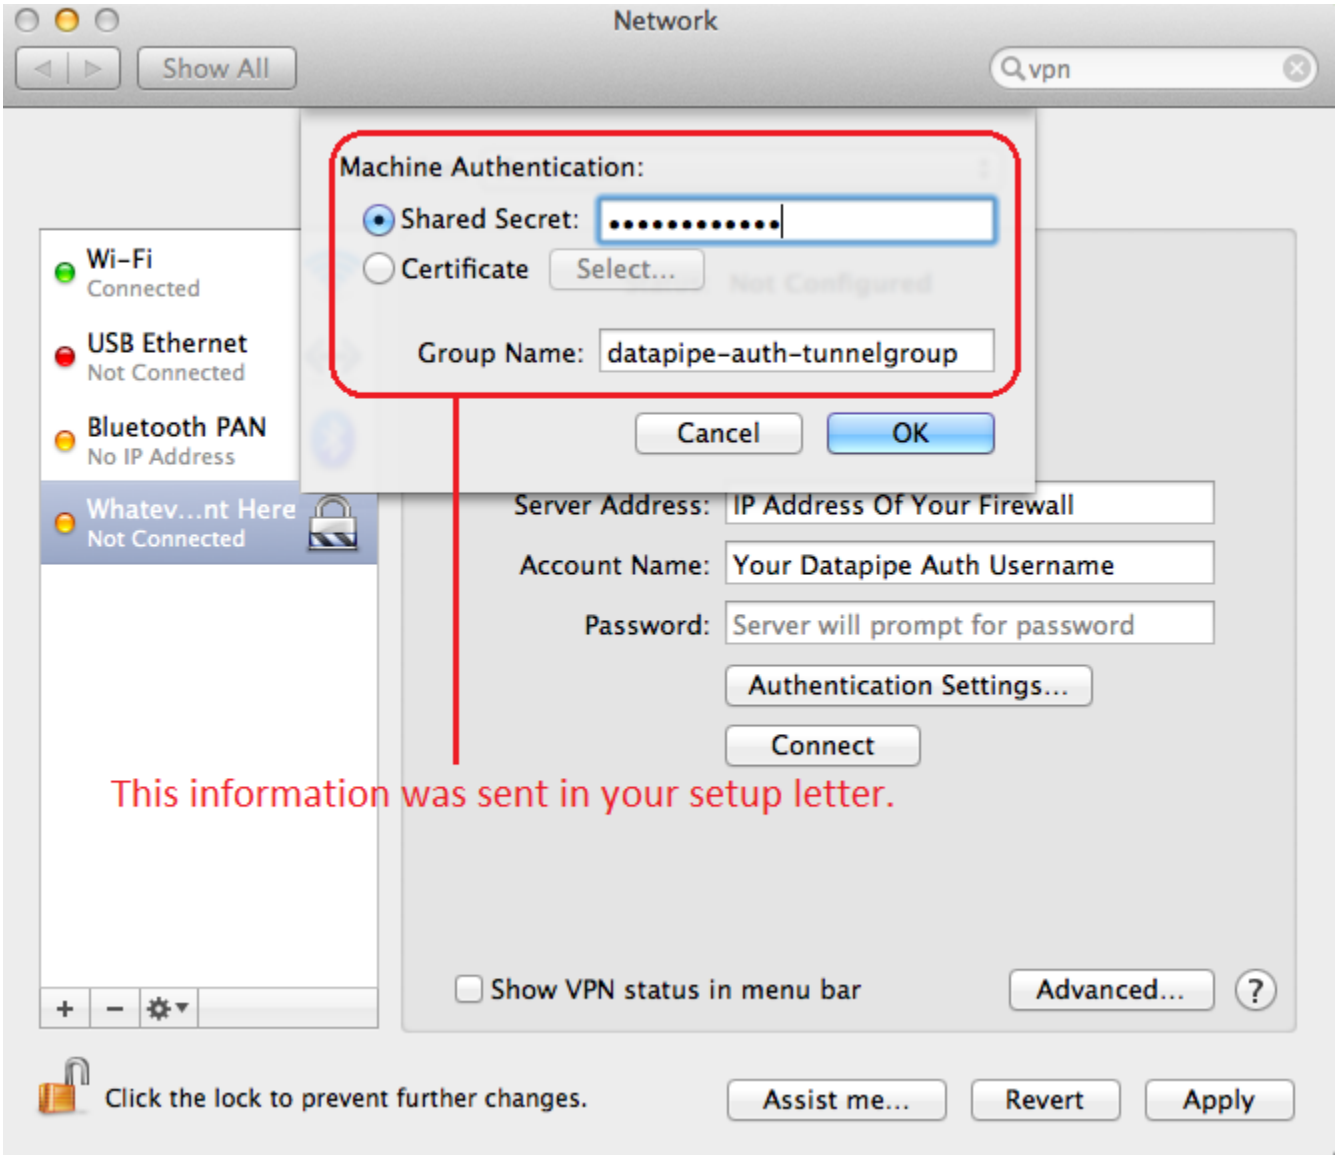

7. When using the VPN be sure to enter your correct Datapipe Auth username and PIN + token.

